



Pulse

- 2 Magnets for pulse value 1L/10L/100L/1000L
- 4 Magnets for pulse value 0.5L/5L/50L/500L



Pulse

- 2 Magnets for pulse value 0.02L (50 pulses/L)
- 4 Magnets for pulse value 0.01L (100 pulses/L)

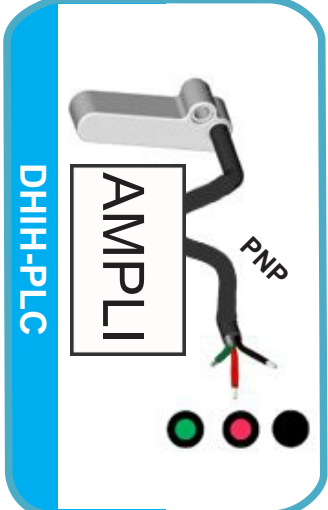

POLARITY !!!


3.5...24VDC max 50mA

GND

PULSE


$V_{out} = V_{in}$

$I_{out} = 5mA \text{ max}$

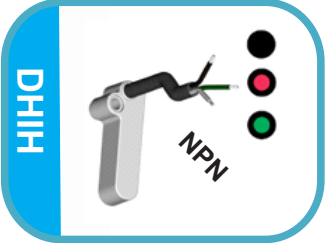


Pulse

- 2 Magnets for pulse value 1L/10L/100L/1000L
- 4 Magnets for pulse value 0.5L/5L/50L/500L

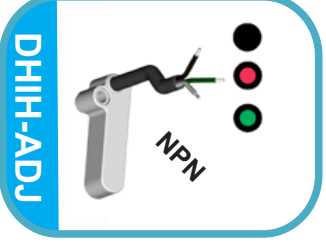

Pulse

- 2 Magnets for pulse value 0.02L (50 pulses/L)
- 4 Magnets for pulse value 0.01L (100 pulses/L)

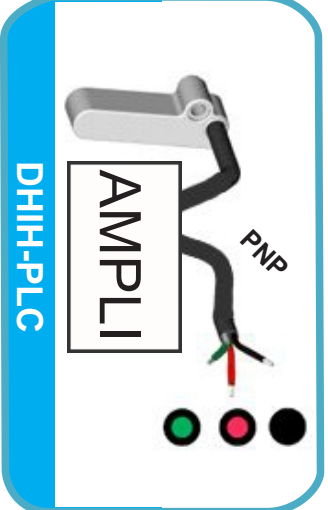

POLARITY !!!

3.5...24VDC max 50mA

GND


PULSE

$V_{out} = V_{in}$

$I_{out} = 5mA \text{ max}$



DHI Metering Europe S.A.
Z.A.E. « La Source »
Rue Henri Leclercq 22
B-7911 Fresnes-lez-Auvillers
Belgium
Tel: +32 69 85 79 10
Fax: +32 69 85 79 10
http://www.dhimetering.eu
email: info@dhimetering.eu

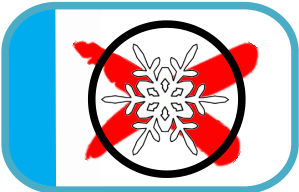


DHI Metering Europe S.A.
Z.A.E. « La Source »
Rue Henri Leclercq 22
B-7911 Fresnes-lez-Auvillers
Belgium
Tel: +32 69 85 79 10
Fax: +32 69 85 79 10
http://www.dhimetering.eu
email: info@dhimetering.eu




360 DEGREE CIRCULAR INDICATOR LIGHT



Specifications	NPN to PNP
Action indicator	Power: Green LED Ouput: Red LED
Voltage	5-30VDC
Circuit protection	Polarity protection, surge protection, overcurrent protection, reverse connection protection
Load current	300mA max
Response time	1μs
Operating temperature	-25℃~75℃
Protection grade	IP67
Connection type	3 Wire (Brown、Blue、 Black) at both ends of the wire length 35cm
Shell material	Stainless steel

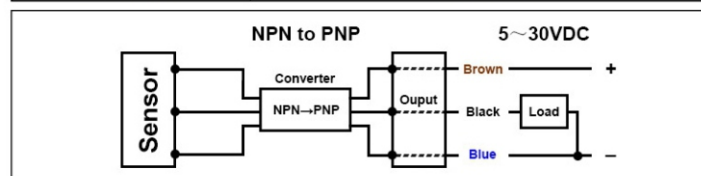

NPN



Black (Signal line)
Brown +V
Blue 0V




- **RED** 5~30VDC
- **GREEN** Pulse OUT
- **BLACK** 0V

PNP


360 DEGREE CIRCULAR INDICATOR LIGHT



Specifications	NPN to PNP
Action indicator	Power: Green LED Ouput: Red LED
Voltage	5-30VDC
Circuit protection	Polarity protection, surge protection, overcurrent protection, reverse connection protection
Load current	300mA max
Response time	1μs
Operating temperature	-25℃~75℃
Protection grade	IP67
Connection type	3 Wire (Brown、Blue、 Black) at both ends of the wire length 35cm
Shell material	Stainless steel

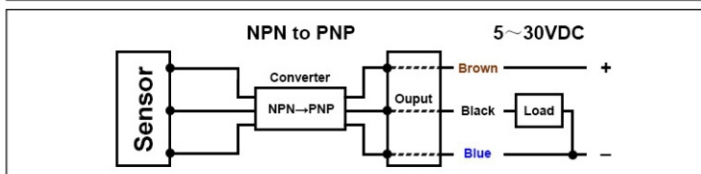

NPN



Black (Signal line)
Brown +V
Blue 0V



- **RED** 5~30VDC
- **GREEN** Pulse OUT
- **BLACK** 0V

PNP